

Lacquered Wood

6x36 Porcelain

mosaic 
Products. Design. Solutions.




04LACWHI636G



04LACBLA636G



04LACHON636G

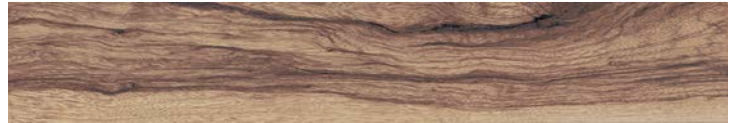

04LACVIN636G



04LACNAT636G



04LACCHE636G



Tile: 6x36

For more information
and images:



Lacquered Wood

Porcelain



Technical Characteristics

Specs	Test Method	Industry Standard	Test Result	
Water Absorption	ASTM C373	$\leq 0.5\%$	$\leq 0.4\%$	
Surface Wear Resistance	ANSI A137.1	Surface wear resistance properties of glazed vitreous and porcelain tile.	All Commercial / Residential	
Chemical Resistance	ASTM C650	No tile sample shows visible defects after continuous contact with a variety of chemicals for 24 hours.	Not Affected	
DCOF (Wet)	ANSI A326.3	≥ 0.42	≥ 0.42	
Stain Resistance	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures.	Not Affected	
Breaking Strength	ASTM C648	≥ 250 lbf	≥ 300 lbf (8 mm); ≥ 400 lbf (10 mm)	
Freeze Resistance	ASTM C1026	No tile sample shows visible defects after repeated processes of freezing and thawing.	Resistant	
Warpage Edge	ASTM C485	$\pm 0.40\%$ or ± 0.05 in (± 1.8 mm)	$\pm 0.40\%$	Rectified
			$\pm 0.50\%$	Calibrated
Warpage Diagonal	ASTM C485	$\pm 0.40\%$ or ± 0.07 in (± 1.8 mm)	$\pm 0.40\%$	Rectified
			$\pm 0.50\%$	Calibrated
Wedging	ASTM C502	$\pm 0.25\%$ or ± 0.03 in (± 0.8 mm)	$\pm 0.25\%$	Rectified
			$\pm 0.50\%$	Calibrated
Thickness	ASTM C499	Range: ± 0.04 in	≤ 0.04 in	
Recycled Content	As reported		$\geq 45\%$ Pre-Consumer	

Nominal Size	Actual Size	Thickness	Finish	Rectified
6" x 36"	5.91" x 35.43"	8 mm	Glossy	-

Installation Note: Due to its linear plank shape, this material requires particular care when it comes to installation. The tile will look its best when offset is less than 33%. The staggered installation will minimize lippage which is common in tiles of this format. No claim will be honored after installation.